## **GECO – WHERE EXCITEMENTSTARTS** THE WORLD OF HUNTING & SPORT SHOOTING

Geco

#### **TABLE OF CONTENTS**

THE WORLD OF GECO	3
Foreword	3
GECO News	4
CENTREFIRE RIFLE CARTRIDGES	7
HUNTING	7
New Products	8
Overview	9
STAR	10
ZERO	11
PLUS	12
EXPRESS	13
SOFTPOINT	14
Ballistic Data	15
SPORT SHOOTING	19
New Products	20
Overview	21
TARGET HP	22
TARGET FMJ	23
SPORT	24
DTX	25
Ballistic Data	26
sila.	

PISTOLS & REVOLVERS	28
New Products	29
Overview	30
ACTION EXTREME	31
ACTION EXTREME FRAGMENTATION	32
HEXAGON	33
Ballistic Data	34
RIMFIRE	38
RIFLE & SEMI-AUTO	38
AIRGUN	39
DIABOLO & SUPERPOINT	39
SHOTSHELLS	40
CCS BLACK 26 & CCS RED 28	40
CC BUCKSHOT & DYNAMIC BIRD SHOT	41
RELOADING COMPONENTS	42
Primers	43
Bullets	44
Cases	46
1	-

# CONTENT

OPTICS	47
Riflescopes	48
Red Dot Sights	51
Binoculars	52
Iconography	55



## WELCOME TO THE WORLD OF GECO!

**Innovative developments and growth have shaped the GECO brand since its foundation in 1887:** Originally a weapons and ammunition wholesaler, GECO quickly developed into a flourishing company.

With more than 130 years of experience and expertise, GECO today offers a modern and wide range of products for hunters and sport shooters worldwide. The assortment ranges from ammunition through optics to selected equipment and covers all applications in hunting and sports. The maxim: high quality standards combined with an attractive value for money.

Over time, in addition to the range, the brand image and the brand perception have continued to develop. The aim of the revision of the brand identity in 2021 is to express the passion of the users more clearly - whether for hunting or sport shooting. The fresh, dynamic new look from GECO underlines the identity of the brand even more clearly.

Our patron Genschow would probably be proud – and rightly so. His guiding principle of "quality products in the service of hunting and sport" remains firmly embedded in the **GECO brand DNA.** Or, as we put it: **WHERE EXCITEMENT STARTS.** 

# MORE THAN A LOGO

As part of the brand refresh, one of its most striking recognition elements, the **GECO logo**, has been given a new look that expresses the **dynamics and enthusiasm** for the endeavour in style. Since GECO was founded, great importance has been attached to a **coherent brand presence** and the logo has always been perfected as part of a holistic image.

### WHERE EXCITEMENT STARTS

The brand presents itself in a modern and contemporary way, on the one hand to underline its unique and unmistakable qualities, and on the other hand to continue to meet the Zeitgeist of modern hunters and sport shooters.

The feeling of tension or suspense in any form – from boundless anticipation to maximum concentration –

is expressed with the new claim "Where Excitement Starts". This is especially true when it comes to active hunting and sport shooting. The shape and components of the new logo visualise precisely this high-stakes feeling of anticipation, excitement, concentration and performance that make the worlds of hunting and sport shooting so special.

eco

## NEW LOOK! NEW PACKAGING!

#### GECO now comes in a new guise.

In order to enable hunters and sport shooters to quickly identify what they are looking for, the packaging has been given a new colour palette. Ammunition packaging for hunting will be in red, while packaging for the sports segment will be black. Optics products, on the other hand, will in future come in white packaging.



## **NEW:** LABELS ON ALL HUNTING AMMUNITION PACKAGING

A small but useful aid is now available to GECO hunting fans.

The new labels include important information on the ballistic data of the respective products and provide an optimal overview for successful deployment.

PLUS

Ο

WHERE EXCITEMENT STARTS

FRONT VIEW

PRODUCT BRAND PLUS CALIBRE 2 <sup>-0</sup>.308 Win. 11,0 g | 170 gr 🙆 LOGO BULLET WEIGHT BALLISTIC DATA Ballistische Daten I Lauflänge 600 mm 50 100 150 200 250 Entfernung (m) 0 300 677 629 582 538 Geschwindigkeit (m/s) 780 727 497 3346 2907 2521 2176 1863 1592 1359 Energie (J) -0,2 🛞 -5,2 -16,6 -35,3 -62,5 ⊕ 100 m (cm) GEE 🕀 156 m (cm) 1,8 4,0 0,8 -8,5 -25,2 -50,5 Ballistic Data I Barrel Length 600 mm (23.5 in) Distance (yds.) 0 50 100 150 200 250 300 Velocity (ft/s) 2559 2401 2249 2102 1962 1827 1699 (ft.lbs) 2468 2173 1906 1665 1451 1258 1088 Energy (inch) -0.2 
 -1.5 -4.9 -10.6 -19.0 ⊕ 100 yds. MRD 
170 yds. (inch) 0.5 1.5 0.8 -1.8 -6.8 -14.3 **PROOF MARK** NET EXPLOSIVE WEIGHT 60g osivstoffgewicht Nettoex Net explosive weight **BARCODE** (44) Poids net de l'explosif Peso mat, expl. 231 78 05 🔘 röksvagt krut 000294 178054 **9** ARTICLE NUMBER

 $\cap$ 

**REAR VIEW** 

GECO has five different bullet lines for quality and price-conscious hunters to ensure they can select the ideal and most suitable rounds. The compelling names of the bullet lines not only have recognition value, but also offer orientation and provide transparency regarding their application. GECO PLUS is ideally suited for shooting strong game. GECO EXPRESS ensures hits over long distances. GECO SOFTPOINT is a real all-rounder and can be used universally for all types of game. GECO ZERO is lead-free and delivers an incredibly powerful knock-down effect. GECO STAR is lead-free and is also designed to achieve maximum penetration. GECO thus opens the doors to the world of hunting and guarantees the best possible hunting experience.

Impressive accuracy and balanced terminal ballistic performance are inherent features of the brand, as are ensuring the highest levels of quality and providing reliable solutions. **GECO – WHERE EXCITEMENT STARTS.** 



### **STAR**

2021: New addition to the product line in the calibres 7 x 64, 8 x 57 JS and 8 x 57 JRS NEW



STAR represents the latest development in GECO's range of hunting bullets. The lead-free deformation bullet promises maximum penetration and a high residual weight.

Due to the hollow point, the new STAR bullet reliably deforms at nearly any hunting distance. Its excellent inherent precision can be attributed to the integrated performance grooves.

GECO STAR is the optimum bullet for all hunters who hunt with lead-free bullets and want to minimise damage to the venison.



### **EXPRESS**



NEW 2021: New additions to the product line in the calibres 6.5 Creedmoor and 6.5 x 55 SE

C

GECO EXPRESS is characterised by its flat trajectory, high projectile velocity and an especially high instantaneous effectiveness. The noticeably streamlined shape of the bullet with GECO EXPRESS tip allows more accurate shots at long range without point-of-aim correction.

The jacket construction enables high projectile speeds that are held right up to the target and converted into energy upon impact. Energy that stops the targets reliably.





## CENTREFIRE **RIFLE CARTRIDGES GECO HUNTING BULLETS AT A GLANCE**

EAD FREE

RIII I FT

### **STAR**

### PERFORMANCE

-						
1	1		1		1	
ACCURACY						
FLAT T <mark>RAJE</mark>	CTORY					
KNOCK-DO	WN POWI	ER				
PENETRATIC	ON					
MINIMAL M	EAT LOSS	5				
I	I		I		I	
				, ,	-	Ň

### **PLUS**

#### PERFORMANCE 1 1 ACCURACY FLAT TRAJECTORY KNOCK-DOWN POWER PENETRATION MINIMAL MEAT LOSS 1 7 -

#### **ZERO** EAD FREE PERFORMANCE BULLET 1 ACCURACY FLAT TRAJECTORY KNOCK-DOWN POWER PENETRATION MINIMAL MEAT LOSS A 🚗 🕅

### **EXPRESS**

#### PERFORMANCE



### SOFTPOINT


#### PERFORMANCE

_				ł
ACCURAC	CY Y			
FLAT TRA	JECTORY			
KNOCK-D	OWN POWER			
PENETRA	TION			
MINIMAL	MEAT LOSS			
I	I	1	I	I

7

geco-ammunition.com 9

GECO STAR – The lead-free deformation bullet promises maximum penetration and a high residual weight.




**GECO HOLLOW POINT:** For reliable deformation at all distances

**GECO GROOVES:** For maximum precision and optimum ballistics

**GECO COPPER CORE:** For deep penetration and high knock-down power

#### PERFORMANCE

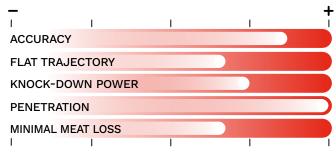





## **STAR** THE DYNAMIC HUNTING BULLET

### **NEW** 2021: New addition to the product line in the calibre 7x64

**STAR represents the latest development in GECO's range of hunting bullets.** Due to the hollow point, the new STAR bullet reliably deforms at nearly any hunting distance. Its excellent inherent precision can be attributed to the integrated performance grooves.

This makes GECO STAR the perfect bullet for anyone who values lead-free bullets and who wants to minimise damage to the venison.

WHERE EXCITEMENT STARTS

STAR



## **ZERO** THE CLEVER HUNTING BULLET

The partially fragmenting bullet GECO ZERO distinguishes itself from the competition with its superior precision and high instantaneous effectiveness, all the while eschewing lead and without compromising on quality. This highly innovative jacketed bullet has two tin cores. Supported by the hollow point construction, the pre-fragmented front core disintegrates immediately when it hits the body of the game and releases a large part of the energy that quickly stops the target reliably. The rear tin core, together with the jacket forms the rest of the bullet's stable body and allows for deep penetration and a secure exit wound.

All this makes GECO ZERO an excellent choice.

ZERO


WHERE EXCITEMENT STARTS

x 🛪 🚗

GECO ZERO – The highly effective and accurate lead-free bullet. For all types of game.

#### GECO PERFORMANCE POINT: For accuracy and secure expansion PRE-FRAGMENTED TIN Front Core: For reliable performance and solid stopping power REAR CANNELURE: For heigh weight retention and a secure exit wound

#### PERFORMANCE

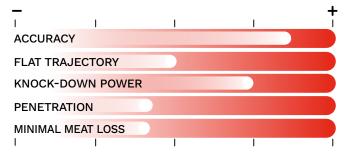



GECO PLUS – Penetrates deeply and preserves even larger game.



## PLUS THE POWERFUL HUNTING BULLET

GECO PLUS boasts state-of-the-art, precise bullet

**technology.** GECO's bonding technology is characterised by an extremely solid bond between the core and the jacket of the bullet. GECO PLUS loses almost none of its parts when mushrooming and is able to reliably penetrate even large game and bones. The strong bond between the lead core and jacket ensures that the venison remains clean, as almost no residue remains.

Deformation is guided by the predetermined breaking points visible on the outside of the jacket and is what gives the bullet its effectiveness.

PLUS

WHERE EXCITEMENT STARTS

#### PERFORMANCE

<del>_</del>	I	I	I	<b>+</b>
ACCURAC	Y			
FLAT T <mark>RA</mark>	JECTORY			
KNOCK-D	OWN POWE	२		
PENETRA	TION			
MINIMAL	MEAT LOSS			
I	I	1	I	



Residual weight > 90%

## EXPRESS THE FAST HUNTING BULLET

### **NEW** 2021: New additions to the product line in the calibres 6.5 Creedmoor and 6.5 x 55 SE

GECO EXPRESS is characterised by its flat trajectory, high projectile velocity and an especially high instantaneous effectiveness. The noticeably streamlined shape of the bullet with GECO EXPRESS tip allows more accurate shots at long distances without point-of-aim correction.

The jacket construction enables high projectile speeds that are held right up to the target and converted into energy upon impact.

Energy that stops the targets reliably.

EXPRESS


WHERE EXCITEMENT STARTS

### \*\*\*

GECO EXPRESS – Suited to any hunting scenario that demands accuracy and efficacy at long range.



#### PERFORMANCE

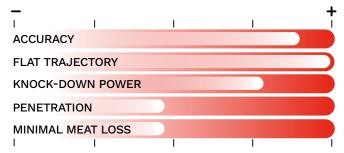



GECO SOFTPOINT – Universally applicable and able to cope with almost any hunting situation.



## **SOFTPOINT** THE CLASSIC HUNTING BULLET

GECO SOFTPOINT is a bullet with an universal range of use that is able to cope with the demands of almost any hunting situation. It can be relied on to respond appropriately in the game and produce a good terminal ballistic performance. The thin-walled bullet jacket is the secret to its successful design. Deformation begins from its pronounced lead tip, and the jacket adapts to the target resistance.

SOFTPOINT

WHERE EXCITEMENT STARTS

#### PERFORMANCE





geco-ammunition.com 14

NEW

NEW

Bullet Item No.	Gram Grain		n V <sup>2)</sup> E	0 m	50 m	100 m	150 m	200 m	250 m	300 m	⊕ RZR* <sup>3)</sup>	50 m	100 m	150 m	200 m	250 m	300 m	Ctg/ box
.223 REM.																1	~	
SOFTPOINT	<b>T</b> 3.4	600	V[m/sec]	980	909	841	777	715	657	601	⊕ 100 m	-0.5	$\oplus$	-2.9	-9.9	-21.7	-39.2	20
241 34 70	53	0.237	E[J]	1633	1404	1203	1026	870	734	614	RZR 185 m	+1.5	+4.0	+3.0	-2.0	-11.8	-27.2	
EXPRESS	3.6	600	V[m/sec]	1010	926	848	773	703	636	574	⊕ 100 m	-1.1	$\oplus$	-2.4	-8.8	-20.3	-37.9	20
231 78 33	56	0.202	E[J]	1836	1543	1294	1076	890	728	593	RZR 192 m	+0.9	+4.0	+3.6	-0.9	-10.4	-26.0	
.243 WIN.																		
EXPRESS	4.9	600	V[m/sec]	1020	964	910	857	807	759	713	⊕ 100 m	-1.2	$\oplus$	-1.8	-6.9	-15.8	-29.0	20
231 78 34	76	0.305	E[J]	2549	2277	2029	1799	1596	1411	1246	RZR 210 m	+0.8	+4.0	+4.3	+1.1	-5.8	-16.9	
SOFTPOINT	<b>T</b> 6.8	600	V[m/sec]	880	834	789	745	703	663	624	⊕ 100 m	-0.7	$\oplus$	-3.2	-10.9	-23.5	-41.7	20
212 34 01	105	0.335	E[J]	2633	2365	2117	1887	1680	1495	1324	RZR 179 m	+1.3	+4.0	+2.8	-2.9	-13.5	-29.7	
6.5 CREEDMO	OR																	
EXPRESS	9.1	600	V[m/sec]	807	771	735	701	668	636	604	⊕ 100 m	-0.4	$\oplus$	-4.1	-13.2	-27.8	-48.5	20
241 96 37	140	0.406	E[J]	2963	2705	2458	2236	2030	1840	1660	RZR 168 m	+1.6	+4.0	+1.9	-5.1	-17.7	-36.4	
6.5x55 SE																		
EXPRESS	9.1	650	V[m/sec]	730	697	666	635	605	576	548	⊕ 100 m	0.0	$\oplus$	-5.6	-17.2	-35.6	-61.3	20
241 96 38	140	0.428	E[J]	2425	2210	2018	1835	1665	1510	1366	RZR 153 m	+2.0	+4.0	+0.4	-9.3	-25.6	-49.4	
PLUS	10.1	600	V[m/sec]	750	704	660	618	577	538	501	⊕ 100 m	0.0	$\oplus$	-5.6	-17.7	-37.1	-65.1	20
231 78 39	156	0.308	E[J]	2841	2503	2200	1929	1681	1462	1268	RZR 152 m	+2.0	+4.0	+0.3	-9.7	-27.2	-53.2	
.270 WIN.																		
EXPRESS	8.4	600	V[m/sec]	940	893	847	803	760	719	679	⊕ 100 m	-1.0	$\oplus$	-2.5	-8.7	-19.3	-34.5	20
231 78 36	130	0.344	E[J]	3711	3349	3013	2708	2426	2171	1936	RZR 194 m	+1.1	+4.0	+3.6	-0.7	-9.2	-22.4	
SOFTPOINT	<b>T</b> 9.1	600	V[m/sec]	910	846	785	727	671	618	567	⊕ 100 m	-0.8	$\oplus$	-3.2	-11.1	-24.4	-44.2	20
231 78 22	140	0.247	E[J]	3768	3257	2804	2405	2049	1738	1463	RZR 178 m	+1.2	+4.0	+2.8	-3.1	-14.4	-32.3	
PLUS	9.7	600	V[m/sec]	850	802	755	710	667	625	586	⊕ 100 m	-0.6	$\oplus$	-3.7	-12.3	-26.4	-46.9	20
231 78 37	150	0.316	E[J]	3504	3120	2765	2445	2158	1895	1665	RZR 172 m	+1.4	+4.0	+2.3	-4.3	-16.4	-34.8	
.270 WSM																		
EXPRESS	8.4	650	V[m/sec]	940	893	847	803	760	719	679	⊕ 100 m	-1,0	$\oplus$	-2.5	-8.7	-19.3	-34.5	20
231 78 38	130	0.344	E[J]	3711	3349	3013	2708	2426	2171	1936	RZR 194 m	+1.1	+4.0	+3.6	-0.7	-9.2	-22.4	
7x57				-														
ZERO	8.2	600	V[m/sec]	870	814	760	708	659	611	566	⊕ 100 m	-0.6	$\oplus$	-3.6	-12.1	-26.3	-47.1	20
231 88 17	127	0.274	E[J]	3103	2717	2368	2055	1781	1531	1313	RZR 173 m	+1.4	+4.0	+2.4	-4.1	-16.3	-35.0	
	<b>T</b> 10.7	600	V[m/sec]	800	759	720	681	644	608	574	⊕ 100 m	-0.4	$\oplus$	-4.4	-14.0	-29.6	-51.9	20
231 85 61	165	0.360	E[J]	3424	3082	2773	2481	2219	1978	1763	RZR 164 m	+1.6	+4.0	+1.6	-6.0	-19.6	-39.9	

С

_						_			_		_		-				-			
	Bullet Item No.	Gram Grain	Barrel in mm BC Value <sup>1)</sup>	V <sup>2)</sup> E	0 m	50 m	100 m	150 m	200 m	250 m	300 m	⊕ RZR* <sup>3)</sup>	50 m	100 m	150 m	200 m	250 m	300 m	Ctg/ box	
_	7 x 57 R																1	~		
1	ZERO	8.2	600	V[m/sec]	820	766	714	664	616	571	527	⊕ 100 m	-0.4	$\oplus$	-4.4	-14.4	-30.9	-55.0	20	
	231 88 18	127	0.274	E[J]	2757	2406	2090	1808	1556	1337	1139	RZR 163 m	+1.6	+4.0	+1.6	-6.4	-20.9	-42.9		PCEAD FREE BULLET
	SOFTPOINT	10.7	600	V[m/sec]	750	711	673	636	600	566	533	⊕ 100 m	-0.1	$\oplus$	-5.4	-16.8	-35.1	-61.0	20	
	212 33 55	165	0.360	E[J]	3009	2705	2423	2164	1926	1714	1520	RZR 154 m	+1.9	+4.0	+0.6	-8.9	-25.2	-49.1		
	7 MM REM. MAG.							·												
	ZERO	8.2	650	V[m/sec]	980	919	861	805	752	700	651	⊕ 100 m	-1.0	$\oplus$	-2.3	-8.3	-18.7	-34.2	20	
	231 88 68	127	0.274	E[J]	3938	3463	3039	2657	2319	2009	1738	RZR 197 m	+1.0	+4.0	+3.8	-0.3	-8.7	-22.1		LEAD FREE BULLET
	EXPRESS	10.0	650	V[m/sec]	890	852	816	780	746	712	679	⊕ 100 m	-0.8	$\oplus$	-2.9	-9.8	-21.1	-37.3	20	
	231 78 43	155	0.418	E[J]	3961	3630	3329	3042	2783	2535	2305	RZR 186 m	+1.2	+4.0	+3.1	-1.8	-11.1	-25.2		
	PLUS	11.0	650	V[m/sec]	866	825	785	746	709	672	637	⊕ 100 m	-0.7	$\oplus$	-3.3	-11.0	-23.6	-41.6	20	
	231 78 44	170	0.375	E[J]	4125	3743	3389	3061	2765	2484	2232	RZR 178 m	+1.3	+4.0	+2.7	-3.0	-13.6	-29.7		
	.280 REM.							·				·								
	SOFTPOINT	10.7	600	V[m/sec]	830	788	748	709	671	634	598	⊕ 100 m	-0.5	$\oplus$	-3.9	-12.6	-26.8	-47.2	20	
	211 75 84	165	0.360	E[J]	3686	3322	2993	2689	2409	2150	1913	RZR 170 m	+1.5	+4.0	+2.1	-4.6	-16.8	-35.2		
	7x64																			
	ZERO	8.2	600	V[m/sec]	940	881	824	770	718	668	620	⊕ 100 m	-0.9	$\oplus$	-2.7	-9.6	-21.2	-38.3	20	CEAD FREE
	231 88 19	127	0.274	E[J]	3623	3182	2784	2431	2114	1830	1576	RZR 188 m	+1.1	+4.0	+3.3	-1.5	-11.1	-26.2		CEAD FREE BULLET
	STAR	9.1	650	V[m/sec]	925	849	778	711	647	585	528	⊕ 100 m	-0.8	$\oplus$	-3.3	-11.4	-25.5	-46.8	20	
	242 09 77	140	0.210	E[J]	3893	3280	2754	2300	1905	1557	1268	RZR 177 m	+1.2	+4.0	+2.7	-3.4	-15.5	-34.8		LEAD FREE BULLET
	EXPRESS	10.0	600	V[m/sec]	880	843	806	771	737	703	670	⊕ 100 m	-0.8	$\oplus$	-3.0	-10.1	-21.8	-38.4	20	
	231 78 40	155	0.418	E[J]	3872	3553	3248	2972	2716	2471	2245	RZR 184 m	+1.2	+4.0	+3.0	-2.1	-11.7	-26.3		
	SOFTPOINT	10.7	600	V[m/sec]	840	798	757	718	679	642	607	⊕ 100 m	-0.6	$\oplus$	-3.7	-12.2	-26.0	-45.8	20	
	212 33 12	165	0.360	E[J]	3775	3407	3066	2758	2467	2205	1971	RZR 172 m	+1.4	+4.0	+2.3	-4.2	-16.0	-33.8		
	PLUS	11.0	600	V[m/sec]	830	790	751	713	677	641	607	⊕ 100 m	-0.5	$\oplus$	-3.8	-12.5	-26.5	-46.5	20	
	231 78 41	170	0.375	E[J]	3789	3433	3102	2796	2521	2260	2026	RZR 171 m	+1.5	+4.0	+2.2	-4.4	-16.4	-34.4		
	7 x 65 R																			
	ZERO	8.2	600	V[m/sec]	890	833	778	726	676	627	581	⊕ 100 m	-0.7	$\oplus$	-3.3	-11.3	-24.7	-44.4	20	CEAD FREE
	231 88 20	127	0.274	E[J]	3248	2845	2482	2161	1874	1612	1384	RZR 177 m	+1.3	+4.0	+2.7	-3.3	-14.7	-32.3		CEAD FREE BULLET
	SOFTPOINT	10.7	600	V[m/sec]	800	759	720	681	644	608	574	⊕ 100 m	-0.4	$\oplus$	-4.4	-14.0	-29.6	-51.9	20	
	212 26 85	165	0.360	E[J]	3424	3082	2773	2481	2219	1978	1763	RZR 164 m	+1.6	+4.0	+1.6	-6.0	-19.6	-39.9		
	PLUS	11.0	600	V[m/sec]	810	771	732	695	659	624	590	⊕ 100 m	-0.4	$\oplus$	-4.2	-13.4	-28.3	-49.5	20	
	231 78 42	170	0.375	E[J]	3609	3269	2947	2657	2389	2142	1915	RZR 167 m	+1.6	+4.0	+1.9	-5.3	-18.2	-37.4		

С

1) BC value = Ballistic coefficient

NEW

3) RZR = Recommended Zero Range

	Bullet Item No.	Gram Grain	Barrel in mm BC Value <sup>1)</sup>	V <sup>2)</sup> E	0 m	50 m	100 m	150 m	200 m	250 m	300 m	⊕ RZR* <sup>3)</sup>	50 m	100 m	150 m	200 m	250 m	300 m	Ctg/ box	
-	.308 WIN.															-	1	-		
	ZERO	8.8	600	V[m/sec]	870	803	739	679	621	566	515	⊕ 100 m	-0.6	$\oplus$	-3.9	-13.2	-28.8	-52.2	20	
	231 88 23	136	0.229	E[J]	3330	2837	2403	2029	1697	1410	1167	RZR 168 m	+1.4	+4.0	+2.1	-5.2	-18.9	-40.3		BULLET
-	STAR	10.7	600	V[m/sec]	783	746	709	673	638	605	573	⊕ 100 m	-0.3	$\oplus$	-4.6	-14.6	-30.7	-53.5	20	
	241 38 33	165	0.388	E[J]	3280	2977	2689	2423	2178	1958	1757	RZR 162 m	+1.7	+4.0	+1.5	-6.5	-20.6	-41.4		BULLET
	EXPRESS	10.7	600	V[m/sec]	825	788	752	717	683	649	617	⊕ 100 m	-0.5	$\oplus$	-3.8	-12.4	-26.3	-46.0	20	
	231 78 04	165	0.404	E[J]	3641	3322	3025	2750	2496	2253	2037	RZR 171 m	+1.5	+4.0	+2.2	-4.4	-16.2	-33.9		
, I	SOFTPOINT	11.0	600	V[m/sec]	790	742	696	652	610	569	530	⊕ 100 m	-0.3	$\oplus$	-4.8	-15.4	-32.6	-57.4	20	
	212 34 28	170	0.305	E[J]	3433	3028	2664	2338	2047	1781	1545	RZR 159 m	+1.7	+4.0	+1.1	-7.5	-22.7	-45.5		
	PLUS	11.0	600	V[m/sec]	780	727	677	629	582	538	497	⊕ 100 m	-0.2	$\oplus$	-5.2	-16.6	-35.3	-62.5	20	
	231 78 05	170	0.274	E[J]	3346	2907	2521	2176	1863	1592	1359	RZR 156 m	+1.8	+4.0	+0.8	-8.5	-25.2	-50.5		
_	.30-06																			
Dec	ZERO	8.8	600	V[m/sec]	920	851	785	722	662	605	551	⊕ 100 m	-0.8	$\oplus$	-3.2	-11.1	-24.7	-45.0	20	CEAD FREE
1	231 88 21	136	0.229	E[J]	3724	3186	2711	2294	1928	1611	1336	RZR 178 m	+1.2	+4.0	+2.8	-3.1	-14.7	-33.0		<b>CEAD FREE</b> BULLET
	STAR	10.7	600	V[m/sec]	824	786	750	714	680	646	614	⊕ 100 m	-0.5	$\oplus$	-3.8	-12.5	-26.5	-46.4	20	and a second
1	241 38 35	165	0.397	E[J]	3633	3305	3009	2727	2474	2233	2017	RZR 171 m	+1.5	+4.0	+2.2	-4.5	-16.4	-34.3		LEAD FREE BULLET
	EXPRESS	10.7	600	V[m/sec]	864	826	789	753	718	683	650	⊕ 100 m	-0.7	$\oplus$	-3.2	-10.8	-23.1	-40.8	20	
	231 78 06	165	0.404	E[J]	3994	3650	3330	3033	2758	2496	2260	RZR 179 m	+1.3	+4.0	+2.7	-2.8	-13.2	-28.8		
, 1	SOFTPOINT	11.0	600	V[m/sec]	840	791	743	697	653	610	569	⊕ 100 m	-0.5	$\oplus$	-3.9	-12.9	-27.6	-49.0	20	
1	212 33 20	170	0.305	E[J]	3881	3441	3036	2672	2345	2047	1781	RZR 169 m	+1.5	+4.0	+2.1	-4.9	-17.6	-37.0		
	PLUS	11.0	600	V[m/sec]	835	780	728	677	629	583	539	⊕ 100 m	-0.5	$\oplus$	-4.2	-13.7	-29.4	-52.4	20	
	231 78 07	170	0.274	E[J]	3835	3346	2915	2521	2176	1869	1598	RZR 166 m	+1.5	+4.0	+1.9	-5.7	-19.4	-40.4		
_	.300 WIN. MAG.																			
100	ZERO	8.8	650	V[m/sec]	1010	936	866	799	736	675	618	⊕ 100 m	-1.1	$\oplus$	-2.2	-8.2	-18.8	-34.8	20	
-	231 88 22	136	0.229	E[J]	4488	3855	3300	2809	2383	2005	1680	RZR 197 m	+0.9	+4.0	+3.8	-0.2	-8.8	-22.8		LEAD FREE BULLET
	STAR	10.7	650	V[m/sec]	921	879	839	802	766	729	693	⊕ 100 m	-0.9	$\oplus$	-2.6	-9.0	-19.5	-34.7	20	
	241 38 36	165	0.387	E[J]	4538	4134	3766	3441	3139	2843	2569	RZR 193 m	+1.1	+4.0	+3.5	-0.9	-9.5	-22.6		LEAD FREE BULLET
-	EXPRESS	10.7	650	V[m/sec]	970	929	889	850	812	775	740	⊕ 100 m	-1.1	$\oplus$	-2.0	-7.5	-16.6	-29.9	20	
	231 78 08	165	0.404	E[J]	5034	4617	4228	3865	3527	3213	2930	RZR 205 m	+0.9	+4.0	+4.0	+0.6	-6.5	-17.8		
	SOFTPOINT	11.0	650	V[m/sec]	950	896	845	795	748	701	657	⊕ 100 m	-1.0	$\oplus$	-2.5	-8.8	-19.6	-35.3	20	
	211 75 76	170	0.305	E[J]	4964	4415	3927	3476	3077	2703	2374	RZR 193 m	+1.0	+4.0	+3.6	-0.8	-9.5	-23.3		
-	PLUS	11.0	650	V[m/sec]	940	881	824	770	718	668	620	⊕ 100 m	-0.9	$\oplus$	-2.7	-9.6	-21.2	-38.3	20	
2	231 78 09	170	0.274	E[J]	4860	4269	3734	3261	2835	2454	2114	RZR 188 m	+1.1	+4.0	+3.3	-1.5	-11.1	-26.2		

С

1) BC value = Ballistic coefficient

2) V = Velocity, E = Energy

3) RZR = Recommended Zero Range

		Bullet Item No.	Gram Grain	Barrel in mm BC Value <sup>1)</sup>	V <sup>2)</sup> E	0 m	50 m	100 m	150 m	200 m	250 m	300 m	⊕ RZR* <sup>3)</sup>	50 m	100 m	150 m	200 m	250 m	300 m	Ctg/ box	
	-	8 x 57 JS																	~		
		ZERO	9.0	600	V[m/sec]	900	829	760	695	636	581	530	⊕ 100 m	-0.7	$\oplus$	-3.6	-12.2	-27.0	-49.0	20	
		231 89 47	139	0.225	E[J]	3645	3093	2599	2174	1820	1519	1264	RZR 173 m	+1.3	+4.0	+2.5	-4.2	-16.9	-36.9		PEAD FREE BULLET
IEW	and the local data and the second data and the	STAR	10.4	600	V[m/sec]	816	758	703	648	596	547	503	⊕ 100 m	-0.4	$\oplus$	-4.6	-15.1	-32.6	-58.3	20	EEAD FREE BULLET
	and the strength of the	242 47 29	160	0.255	E[J]	3462	2988	2570	2184	1847	1556	1316	RZR 160 m	1.6	+4.0	+1.3	-7.2	-22.6	-46.4		BULLET
	The second s	SOFTPOINT	12.0	600	V[m/sec]	790	731	674	621	570	521	476	⊕ 100 m	-0.2	$\oplus$	-5.2	-16.8	-36.0	-64.3	20	
		212 33 39	185	0.245	E[J]	3745	3206	2726	2314	1949	1629	1359	RZR 155 m	+1.8	+4.0	+0.7	-8.9	-26.1	-52.4		
	and the second se	PLUS	12.7	600	V[m/sec]	750	709	670	631	595	559	525	⊕ 100 m	-0.1	$\oplus$	-5.4	-17.0	-35.5	-61.9	20	
		231 78 45	196	0.346	E[J]	3572	3192	2851	2528	2248	1984	1750	RZR 154 m	+1.9	+4.0	+0.6	-9.0	-25.5	-50.0		
		8x57 JRS																			
		ZERO	9.0	600	V[m/sec]	850	779	712	651	594	542	494	⊕ 100 m	-0.5	$\oplus$	-4.4	-14.6	-31.7	-57.3	20	EEAD FREE
		231 89 48	139	0.225	E[J]	3251	2731	2281	1907	1588	1322	1098	RZR 163 m	+1.5	+4.0	+1.6	-6.6	-21.8	-45.4		BULLET
	Construction of the owner	STAR	10.4	600	V[m/sec]	836	776	719	664	612	562	515	⊕ 100 m	-0.5	$\oplus$	-4.3	-14.2	-30.7	-54.9	20	CEAD FREE BULLET
EW	and a production	242 47 30	164	0.251	E[J]	3634	3131	2688	2293	1948	1642	1379	RZR 164 m	+1.5	+4.0	+1.7	-6.2	-20.7	-43.0		BULLET
	and the second se	SOFTPOINT	12.0	600	V[m/sec]	760	702	647	595	545	498	455	⊕ 100 m	0.0	$\oplus$	-5.9	-18.7	-39.8	-71.0	20	
		212 33 98	185	0.245	E[J]	3466	2957	2512	2124	1782	1488	1242	RZR 150 m	+2.0	+4.0	+0.1	-10.8	-29.9	-59.1		
		PLUS	12.7	600	V[m/sec]	710	670	632	595	560	526	493	⊕ 100 m	+0.2	$\oplus$	-6.4	-19.7	-40.9	-70.9	20	
		231 78 46	196	0.346	E[J]	3201	2851	2536	2248	1991	1757	1543	RZR 147 m	+2.2	+4.0	-0.4	-11.8	-30.9	-59.0		
	-	9.3 x 62																			
	Contraction of the local data	ZERO	11.9	600	V[m/sec]	870	806	746	688	632	580	530	⊕ 100 m	-0.6	$\oplus$	-3.8	-12.8	-28.0	-50.6	20	
		231 89 50	184	0.241	E[J]	4504	3865	3311	2816	2377	2002	1671	RZR 170 m	+1.4	+4.0	+2.2	-4.8	-18.0	-38.5		PEAD FREE BULLET
		EXPRESS	16.5	600	V[m/sec]	760	724	689	655	622	591	560	⊕ 100 m	-0.2	$\oplus$	-5.0	-15.8	-32.9	-57.0	20	
		231 78 47	255	0.398	E[J]	4765	4324	3916	3539	3192	2882	2587	RZR 158 m	+1.9	+4.0	+1.0	-7.7	-22.8	-44.9		
		SOFTPOINT	16.5	600	V[m/sec]	760	709	660	612	568	525	484	⊕ 100 m	-0.1	$\oplus$	-5.6	-17.8	-37.6	-66.3	20	
		231 18 42	255	0.277	E[J]	4765	4147	3594	3090	2662	2274	1933	RZR 152 m	+1.9	+4.0	+0.4	-9.8	-27.6	-54.4		
		PLUS	16.5	600	V[m/sec]	740	698	658	619	581	545	510	⊕ 100 m	0.0	$\oplus$	-5.7	-17.8	-37.2	-64.9	20	
		231 78 48	255	0.335	E[J]	4518	4019	3572	3161	2785	2450	2146	RZR 152 m	+2.0	+4.0	+0.3	-9.8	-27.2	-52.8		
		9.3 x 74 R	11431	1																	
		ZERO	11.9	600	V[m/sec]	825	764	705	648	595	545	497	⊕ 100 m	-0.4	$\oplus$	-4.6	-15.0	-32.4	-58.1	20	8
		231 89 51	184	0.241	E[J]	4050	3473	2957	2498	2106	1767	1470	RZR 161 m	+1.6	+4.0	+1.4	-7.0	-22.4	-46.1		LEAD FREE BULLET
		SOFTPOINT	16.5	600	V[m/sec]	740	690	641	595	551	509	470	⊕ 100 m	+0.1	$\oplus$	-6.1	-19.1	-40.2	-70.9	20	
		212 33 47	255	0.277	E[J]	4518	3928	3390	2921	2505	2137	1822	RZR 149 m	+2.1	+4.0	-0.1	-11.1	-30.2	-58.9		
		PLUS	16.5	600	V[m/sec]	730	688	648	610	573	537	502	⊕ 100 m	+0.1	$\oplus$	-5.9	-18.5	-38.5	-67.1	20	
		231 79 44	255	0.335	E[J]	4396	3905	3464	3070	2709	2379	2079	RZR 150 m	+2.1	+4.0	0.0	-10.5	-28.6	-55.1		
		110	-Wayles	KIN W	HE SHE	and I		1000	- AVI-												

C

G

1) BC value = Ballistic coefficient

2) V = Velocity, E = Energy

3) RZR = Recommended Zero Range



GECO offers a full portfolio for active and modern sport shooters. GECO SPORT is specially designed for the shooting range and match situations. The balanced load creates a particularly pleasant shooting experience. Success and accuracy are guaranteed even at long distances. The nickel-plated bullet jacket ensures constant muzzle velocities. The new GECO TARGET HP product line guarantees outstanding accuracy. Its products are reliable companions when shooting at long range and ideal for competitions and practice sessions alike. GECO TARGET FMJ – particularly suitable for intensive and continuous practice and for use with semi-automatic weapons with a high rate of fire. For guaranteed precision. Ideal for IPSC shooters. Shooting at an affordable price for constant self-improvement. The GECO DTX line was designed specifically to meet the needs of shooters who use a lot of ammunition: the balanced value for money of the GECO DTX offers the proven GECO quality in a balanced training cartridge.

**CENTREFIRE RIFLE CARTRIDGES** 



### TARGET HP THE LONG RANGE SHOOTING BULLET

**NEW** 2021: New additions for competition and training in the calibres 6.5 Creedmoor and 6.5 x 55 SE

The new GECO TARGET HP rounds have been specially developed for the shooting range and competitions. Its well-balanced load makes the TARGET HP particularly pleasant to shoot. The precisely manufactured hollow-point bullet guarantees outstanding accuracy even at long distances. What's more, the convenient box of 50 offers very good value for money, ideal for regular training at the shooting range.



## CENTREFIRE RIFLE CARTRIDGES GECO SPORT SHOOTING BULLETS AT A GLANCE



#### TARGET HP THE LONG RANGE SHOOTING BULLET


#### PERFORMANCE





SPORT THE MATCH BULLET


#### PERFORMANCE





**DTX** THE PERFECT TRAINING BULLET

#### PERFORMANCE





#### TARGET FMJ THE TRAINING BULLET – MILITARY

#### PERFORMANCE



## TARGET HP THE LONG RANGE SHOOTING BULLET

### NEW 2021: New additions for competition and training in the calibres 6.5 Creedmoor and 6.5 x 55 SE

**GECO TARGET HP – Ideally suited to competitions and the shooting range.** GECO TARGET HP's balanced load allows for a particularly comfortable shooting experience. One of the factors responsible for this is the precisely manufactured hollow-point bullet, which guarantees outstanding accuracy even at long distances.

TEEEEAAA



The convenient box of 50 TARGET HP offers a very good value for money – ideal for regular training on the shooting range.

#### PERFORMANCE

—				+
I	1	1	I	1
ACCURACY				
FLAT T <mark>RAJI</mark>	ECTORY			
L	I.	I	I	1



0

GECO TARGET FMJ is particularly suitable for use with semi-automatic weapons with a high rate of fire. They also guarantee maximum precision, a factor that is appreciated by IPSC shooters in particular.

Offering good value for money, the GECO TARGET FMJ line is particularly well-suited to shooters with high training intensities. The FMJ bullet's tombac jacket reduces fouling of the barrel, thereby significantly reducing cleaning intervals and leaving nothing standing in the way of success.

#### PERFORMANCE

-				+
I	I	I	1	ī
ACCURACY				
FLAT T <mark>RA</mark>	JECTORY			
1	1	1	1	



## TARGET FMJ THE TRAINING BULLET – MILITARY

#### GECO TARGET FMJ products stand for training success.

Constant training on the range is essential – but it is also a lot of fun. GECO TARGET FMJ products enable cost-effective shooting in a practical box of 50.

## SPORT THE MATCH BULLET

Better shooting through regular training: GECO SPORT is specially designed for the shooting range and competitions. Its well-balanced load makes the GECO SPORT particularly pleasant to shoot. The precisely manufactured hollow-point bullet guarantees outstanding accuracy even at long distances.


00

The nickel-plated bullet jacket reduces abrasion in the barrel and ensures constant muzzle velocities. This coating also minimises the build-up of heat in the barrel and reduces the

The intelligent pack of 50 rounds represents a good value for money, leaving nothing standing in the way of regular practice.

#### PERFORMANCE

need for cleaning.








GECO DTX's great value for money in the popular calibres .223 Rem. and .308 Win. makes it a well-balanced practice cartridge – of course in proven GECO quality.

GECO DTX is designed for shooters who use a lot of ammunition and is particularly suitable for simple training.

#### PERFORMANCE





## **DTX** THE PERFECT TRAINING BULLET

The GECO DTX line was built specifically for the needs of shooters who use a lot of ammunition.

														<u> </u>					
	Bullet Item No.	Gram Grain	Barrel length mm BC-Value <sup>1)</sup>	V <sup>2)</sup> E	0 m	50 m	100 m	150 m	200 m	250 m	300 m	⊕ RZR* <sup>3)</sup>	50 m	100 m	150 m	200 m	250 m	300 m	Ctg/box
	4.6x30									·								1.34	
	TARGET FMJ	2.6	420	V[m/sec]	695	645	597	552	508	468	432	⊕ 100 m	0.5		-7.4	-22.8	-47.8	-84.1	50
	241 16 76	40	0.268	E[J]	628	541	463	396	335	285	243	RZR 142 m	+2.5	+4.0	-1.3	-14.7	-37.8	-72.1	
_	6.5 CREEDMOOR																		
w	TARGET HP	8.4	600	V[m/sec]	859	831	803	776	750	724	699	⊕ 100 m	-0.7	Ð	-3.1	-10.2	-21.8	-38.0	50
	242 01 05	130	0.548	E[J]	3108	2909	2716	2537	2370	2208	2058	RZR 183 m	+1.3	+4.0	+2.9	-2.2	-11.8	-26.0	
	6.5 x 55 SE																		
w –	TARGET HP	8.4	600	V[m/s]	820	793	766	740	714	689	664	⊕ 100 m	-0.5		-3.6	-11.7	-24.7	-42.8	50
	242 15 10	130	0.548	E[J]	2832	2649	2472	2307	2148	2000	1857	RZR 174 m	+1.5	+4.0	+2.4	-3.7	-14.7	-30.8	
	.223 REM.																		
	DTX	3.6	600	V[m/sec]	988	919	854	791	732	675	621	⊕ 100 m	-0.5		-2.8	-9.6	-20.9	-37.7	50
	241 92 96	55	0.243	E[J]	1755	1518	1311	1125	963	819	693	RZR 187 m	+1.5	+4.0	+3.2	-1.6	-10.9	-25.7	
	TARGET FMJ	3.6	600	V[m/sec]	1010	948	889	832	778	726	676	⊕ 100 m	-1.1	÷	-2.0	-7.6	-17.0	-31.3	50
	231 75 61	55	0.275	E[J]	1837	1618	1423	1247	1090	949	822	RZR 198 m	+0.7	+3.7	+3.5	-0.2	-7.9	-20.3	
	TARGET FMJ	4.1	600	V[m/sec]	950	903	857	813	770	728	688	⊕ 100 m	-1.0	÷	-2.4	-8.5	-18.6	-33.4	50
	231 75 62	63	0.345	E[J]	1864	1683	1516	1364	1224	1095	977	RZR 192 m	+0.9	+3.8	3.3	-0.9	-9.1	-22.1	
	7x64																		
	SPORT	9.0	600	V[m/sec]	916	870	825	782	740	699	660	⊕ 100 m	-0.9	÷	-2.7	-9.5	-20.7	-37.0	50
	241 17 99	139	0.345	E[J]	3776	3406	3063	2752	2464	2199	1960	RZR 188 m	+1.1	+4.0	+3.3	-1.5	-10.7	-25.0	
	7.62 x 39																		
	TARGET FMJ	8.0	600	V[m/sec]	740	700	662	625	589	555	522	⊕ 100 m	-0.0	Ð	-5.6	-17.5	-36.5	-63.5	50
	231 78 12	124	0.355	E[J]	2245	2009	1797	1602	1422	1263	1117	RZR 153 m	+2.0	+4.0	+0.4	-9.4	-26.4	-51.4	

```
1) BC value = Ballistic coefficien
```

2) V = Velocity, E = Ener

R = Recommended Zero Range

Name         Local         Local <thl< th=""><th></th><th></th><th></th><th></th><th>_</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th>_</th></thl<>					_														_
SPORT         9.5         600         V/m/we/         860         809         760         711         664         620         579         9         100 m         -0.6         9         -3.6         -1.21         -2.62         -4.68         520           24117 88         147         0.300         E(J)         3613         3109         2744         2401         2094         1626         1622         172 m         1.14         -4.0         +2.3         -4.2         .16.3         -3.48					0 m	50 m	100 m	150 m	200 m	250 m	300 m		50 m	100 m	150 m	200 m	250 m	300 m	Ctg/box
Alt         Alt <th>.308 WIN.</th> <th></th> <th>X</th> <th></th> <th></th> <th></th> <th></th> <th></th>	.308 WIN.													X					
TARGET FMJ         9.5         600         V(m/sec)         865         826         787         790         714         679         645         9 100m         -0.7         9         -3.3         -1.0         -3.3         -1.1         5           240 70 05         147         0.392         E[J]         373         328         297         2666         244         2201         1987         R2R 179m         11.3         14.0         42.7         -2.9         -13.3         29.7         24.7         24.9         1987         R2R 179m         11.3         14.0         42.7         -2.9         -13.3         29.7         24.7         24.9         24.7         24.9         13.0         27.7         2.9         22.8         2070         1869         R2R 167m         11.9         44.0         14.8         -5.1         -17.2         -5.0         -2.0         -2.0         -2.0         -2.0         -2.0         2.0	SPORT	9.5	600	V[m/sec]	860	809	760	711	664	620	579	⊕ 100 m	-0.6		-3.6	-12.1	-26.2	-46.8	50
Match Mar         Colo         Market         Colo         Market         Colo         Market         Colo         Market         Colo         Market         Market         Colo         Colo         Market         Colo         Market         Market         Colo         Colo         Market         Market         Colo         Market         Market         Colo         Market         Market         Colo         Market         Markt         Markt         Markt <td>241 17 98</td> <td>147</td> <td>0.300</td> <td>E[J]</td> <td>3513</td> <td>3109</td> <td>2744</td> <td>2401</td> <td>2094</td> <td>1826</td> <td>1592</td> <td>RZR 172 m</td> <td>+1.4</td> <td>+4.0</td> <td>+2.3</td> <td>-4.2</td> <td>-16.3</td> <td>-34.8</td> <td></td>	241 17 98	147	0.300	E[J]	3513	3109	2744	2401	2094	1826	1592	RZR 172 m	+1.4	+4.0	+2.3	-4.2	-16.3	-34.8	
DTX         9,7         6600         V[m/sec]         830         793         756         721         687         653         621         Φ 100 m         -0.1         Φ         -4.2         -131         -272         -4.71         50           241 36 99         150         0.423         E[J]         3343         3049         2776         2523         2288         2070         1869         RZR 167 m         +1.9         +4.0         +1.8         -51         -17.2         -35.0         100         -30.06	TARGET FMJ	9.5	600	V[m/sec]	865	826	787	750	714	679	645	⊕ 100 m	-0.7		-3.3	-10.9	-23.3	-41.1	50
Arr         Arr <td>240 70 05</td> <td>147</td> <td>0.392</td> <td>E[J]</td> <td>3573</td> <td>3258</td> <td>2957</td> <td>2686</td> <td>2434</td> <td>2201</td> <td>1987</td> <td>RZR 179 m</td> <td>+1.3</td> <td>+4.0</td> <td>+2.7</td> <td>-2.9</td> <td>-13.3</td> <td>-29.1</td> <td></td>	240 70 05	147	0.392	E[J]	3573	3258	2957	2686	2434	2201	1987	RZR 179 m	+1.3	+4.0	+2.7	-2.9	-13.3	-29.1	
Image: Note of the state o	DTX	9.7	600	V[m/sec]	830	793	756	721	687	653	621	⊕ 100 m	-0.1		-4.2	-13.1	-27.2	-47.1	50
SPORT       9.5       600       V[m/sec]       940       886       834       784       735       667       642       @ 100 m       -0.9       @       -2.6       -9.2       -20.3       -36.7       567         24117 96       147       0.300       E[J]       4197       3729       3304       2920       2666       2242       1958       RZR 190 m       +11       +4.0       +3.4       -1.2       -10.3       -24.7       -24.7       -300       EJJ       4197       3729       304       2920       2566       2242       1958       RZR 190 m       +11       +4.0       +3.4       -1.2       -10.3       -24.7       -24.7       -300       EJJ       486       3017       2566       2328       RZR 207 m       +0.8       +4.0       +4.1       +0.8       6.3       -17.9       -29.9       6.0       -29.9       6.0       -29.9       6.0       -27.7       -16.3       -29.9       6.0       -27.7       147       0.30       EJJ       4865       4332       3848       3416       3017       2658       2328       RZR 207 m       +0.8       44.0       +4.1       +0.8       -6.3       -27.7       50.3       50.7       24118 00	241 36 99	150	0.423	E[J]	3343	3049	2776	2523	2288	2070	1869	RZR 167 m	+1.9	+4.0	+1.8	-5.1	-17.2	-35.0	
Alt International Alternational Alternatinal Alternal Alternational Alternational Alternational A	.30-06																		
SPORT         9.5         600         V[m/sec]         810         769         729         690         653         616         581 $\oplus$ 100 m         -0.4 $\oplus$ -1.2 $\oplus$ -1.2 $\oplus$ -1.2 $\oplus$ -1.9         -7.2         -16.3         -29.9         50           241 17 97         147         0.300         E[J]         4865         4332         3848         3416         3017         2658         2328         RZR 207 m         +0.8         +4.0         +4.1         +0.8         -6.3         -17.9         17.9           8x 57 JS         50000         V[m/sec]         810         769         729         690         653         616         581 $\oplus$ 100 m         -0.4 $\oplus$ -4.2         -13.6         -28.7         -50.3         5000000000000000000000000000000000000	SPORT	9.5	600	V[m/sec]	940	886	834	784	735	687	642	⊕ 100 m	-0.9		-2.6	-9.2	-20.3	-36.7	50
SPORT       9.5       650       V[m/sec]       1012       955       900       848       797       748       700 $\oplus$ 100 m       -1.2 $\oplus$ -1.9       -7.2       -16.3       -29.9       50         24117 97       147       0.300       E[J]       4865       4332       3848       3416       3017       2658       2328       RZR 207 m       +0.8       +4.0       +4.1       +0.8       -6.3       -17.9<	241 17 96	147	0.300	E[J]	4197	3729	3304	2920	2566	2242	1958	RZR 190 m	+1.1	+4.0	+3.4	-1.2	-10.3	-24.7	
Alt Chill	.300 WIN. MAG.																		
SPORT         12.1         600         V[m/sec]         810         769         729         690         653         616         581 $\oplus$ 100 m         -0.4 $\oplus$ -4.2         -13.6         -28.7         -55.3         5000000000000000000000000000000000000	SPORT	9.5	650	V[m/sec]	1012	955	900	848	797	748	700	⊕ 100 m	-1.2		-1.9	-7.2	-16.3	-29.9	50
SPORT       12.1       600       V[m/sec]       810       769       729       690       653       616       581       ⊕ 100 m       -0.4       ⊕       -4.2       -13.6       -28.7       -50.3       50.3         241 18 00       187       0.359       E[J]       3969       3578       3215       2880       2580       2296       2042       RZR 166 m       +1.6       +4.0       +1.8       -5.5       -18.6       -38.3	241 17 97	147	0.300	E[J]	4865	4332	3848	3416	3017	2658	2328	RZR 207 m	+0.8	+4.0	+4.1	+0.8	-6.3	-17.9	
Altric	8x57 JS																		
9.3 x 62         SPORT       12.7       600       V[m/sec]       867       812       760       709       661       614       570       ⊕       100 m       -0.6       ⊕       -3.6       -12.1       -26.3       -47.0       50	SPORT	12.1	600	V[m/sec]	810	769	729	690	653	616	581	⊕ 100 m	-0.4		-4.2	-13.6	-28.7	-50.3	50
SPORT         12.7         600         V[m/sec]         867         812         760         709         661         614         570         ⊕         100 m         -0.6         ⊕         -3.6         -12.1         -26.3         -47.0         50	241 18 00	187	0.359	E[J]	3969	3578	3215	2880	2580	2296	2042	RZR 166 m	+1.6	+4.0	+1.8	-5.5	-18.6	-38.3	
	9.3x62																		
241 18 01 106 0.291 E[1] 4772 4197 2669 2102 2774 2204 2062 P7P 173 m +14 +4.0 +2.4 41 16.2 24.0	SPORT	12.7	600	V[m/sec]	867	812	760	709	661	614	570	⊕ 100 m	-0.6		-3.6	-12.1	-26.3	-47.0	50
$\frac{2411801}{190} \frac{190}{0.281} \frac{1}{190} \frac{4773}{190} \frac{4167}{3000} \frac{3192}{300} \frac{2774}{2394} \frac{2394}{2003} \frac{2003}{100} \frac{1}{100} 1$	241 18 01	196	0.281	E[J]	4773	4187	3668	3192	2774	2394	2063	RZR 173 m	+1.4	+4.0	+2.4	-4.1	-16.2	-34.9	

1) BC value = Ballistic coefficie

V = Velocity, E = Ener§

R = Recommended Zero Range

#### The range of GECO handgun cartridges has been continuously expanded and consistently tailored to meet the needs of shooters.

For static shooting, dynamic shooting, hunting and self-defence, a diverse portfolio of cartridges is now available. With 13 calibres and 10 different types of bullets, GECO's range of handgun cartridges can always provide you with the perfect product for every individual use case.

HANDGUN CARTRIDGES



## **NEW** HANDGUN CARTRIDGES

## ACTION E TREME

ACTION E TREME

45 AUTO

### NEW 2021: New additions to the product line in the calibres .40 S&W and .45 Auto

Handgun ammunition with unparalleled stopping power. The bullet mushrooms in a controlled manner and impresses with its outstanding expansion properties. The energy is transferred completely to the target and therefore guarantees superb stopping power. Shooters can always count on GECO ACTION EXTREME.



#### NEW 2021: New product line (4 calibres) – 9 mm Browning short, 9 mm Luger, .40 S&W, .45 Auto

Handgun Ammunition with great penetration depth. This hollow-point bullet fragments into five pieces, with the four petals quickly detaching from the core piece and spreading evenly. The residual body of this solid copper projectile achieves great penetration depth. Energy transfer from the five pieces is excellent.







## HANDGUN AMMUNITION REVOLVER & PISTOL BULLETS AT A GLANCE

## ACTION E TREME

The bullet mushrooms in a controlled manner and impresses with its outstanding expansion. The energy is transferred completely to the target and therefore guarantees superb stopping power. Shooters can count on GECO ACTION EXTREME.

# ACTION E TREME

This hollow-point bullet fragments into five pieces, with the four petals quickly detaching from the core piece and spreading evenly. The residual body of this solid copper projectile achieves great penetration depth. The energy transfer from the five pieces is excellent.



The lead exposure in the immediate vicinity of the shooter and the range supervisor can be damaging to one's health. Due to the lead-free GreenFire primer technology that has already been used in NATO-approved ammunition for years, lead is no longer released into the air surrounding the shooter.

In addition, the bullet's rear encapsulation prevents lead particles from detaching when fired.

## HEMAGON

Modelled on the hollow-point design, the HEXAGON bullet was built for absolute precision and without regard for its expansion properties. This non-expanding bullet thus combines the advantages of the HP design, such as the closed end, with optimal potential for accuracy.

### **FMJ/DTX**

Due to its technically simple construction, the FMJ bullet is easy to manufacture. It is therefore extremely interesting for shooters with high training intensities.

### JACKETED HOLLOW-POINT

The hollow-point bullet is the perfect choice if absolute precision is what you are after. That is why it has enjoyed the trust of top shooters from across the globe for many years now.

### SOFTPOINT

The semi jacket bullet represents a compromise between the FMJ and the hollow-point bullet in terms of its design.



## COPPER-PLATED

The reduced smoke production and minimal pollution load of the copper-plated variant round off the advantages of the LRN bullet.

#### ENCAPSULATED FMJ



The encapsulated version emerged as a successor product to the conventional FMJ bullets. It is distinguished by a reduced pollution load and smoke production.

### WAD CUTTER

N

Due to its shoulder-stabilised attitude in flight, the wad cutter bullet allows for outstanding accuracy even with low projectile velocities.


### LEAD ROUND NOSE

The traditional LRN bullet conforms well to the barrel profile and also results in very little wear on the barrel due to reduced friction.



## ACTION E TREME

### EXCEPTIONAL MUSHROOMING, IMPRESSIVE KNOCK DOWN EFFECT.

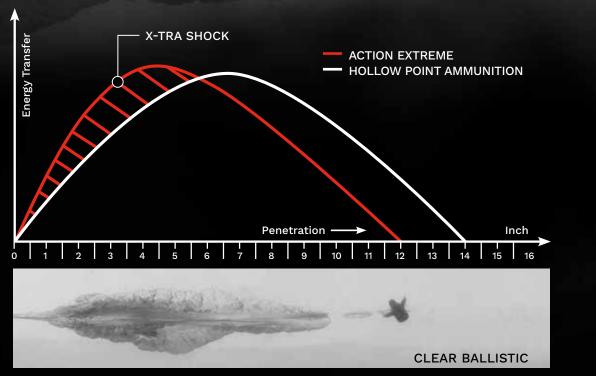

V<sub>o</sub>: 360 m/s / 1181 fps. – E<sub>o</sub>: 454 Joule / 336 ftlbs – Test barrel length: 150 mm

#### ALL-PURPOSE ROUND

Hunting - self defence - personal protection

#### **FUNCTION FIRST**

Safe feeding into the chamber through the ogival form of the bullet. Improved ballistic performance due to streamlined projectile form. Closed bullet design prevents blockage of the breech.

#### FOR ALL BARREL LENGTHS

These new cartridges can be used in Full Size, Compact Size and Sub Compact Size pistols and achieve the same performance data in all models.




### **NEW** 2021: New additions to the current product line in the calibres .40 S&W and .45 Auto

The monolithic, lead-free deformation bullets show controlled mushrooming and impress with extraordinary expansion. The energy is transferred completely to the target, resulting in excellent stopping power.





## ACTION E TREME FRAGMENTATION GREATER PENETRATION, PROVEN STOPPING POWER.

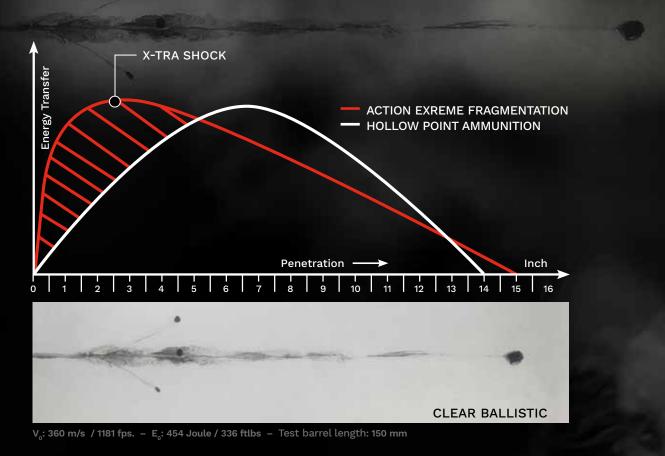

#### ALL-PURPOSE ROUND

Hunting - self defence - personal protection

#### **FUNCTION FIRST**

Safe feeding into the chamber through the ogival form of the bullet. Improved ballistic performance due to streamlined projectile form. Closed bullet design prevents blockage of the breech.

#### FOR ALL BARREL LENGTHS

These new cartridges can be used in Full Size, Compact Size and Sub Compact Size pistols and achieve the same performance data in all models.



### NEW 2021: New product line in the calibres 9 mm Browning short, 9 mm Luger, .40 S&W, .45 Auto

The monolithic, lead-free fragmentation bullets are engineered for all pistol users who prefer greater depth with proven stopping power across the entire velocity range.





For ignition free of heavy metals.

#### ADVANTAGEOUS AERODYNAMIC FORM

The almost closed tip is aerodynamically advantageous, as it provides a longer trajectory with less reduction in velocity.

#### 6 STABILISATION GROOVES

The 6 long grooves create what is referred to as the golf ball effect. This means that the air vortex created by the rotation around the longitudinal axis provides additional stabilisation of the projectile in flight.

#### **OPTIMISED CENTRE OF GRAVITY**

The centre of gravity of the bullet is shifted to the rear, contributing to the improvement of accuracy.

#### IMPROVED BARREL GUIDANCE

The long, cylindrical projectile section achieves improved barrel guidance.

## HE AGO THE BENCHMARK FOR ACCURACY

The GECO HEXAGON in 9 mm Luger, .357 Magnum, .44 Rem. Mag. and .45 Auto are loaded with

**innovations.** It combines state-of-the-art engineering with selected advantages of a hollow-point design and optimised accuracy.

The outcome: Innovative, high-performance precision cartridges for the most ambitious sporting demands.

AGON

VHERE EXCITEMENT STARTS

## **PISTOL CARTRIDGES**

	ltem No.	Calibre	Bullet	Bullet weight g / gr	Primer	Barrel length (mm)*	V <sub>o</sub>	Velocity V <sub>10</sub>	r (m/sec) V <sub>25</sub>	V <sub>50</sub>	E <sub>o</sub>	Energy E <sub>10</sub>	(Joule) E <sub>25</sub>	E <sub>50</sub>	Ctg/ box
	212 32 07	6.35 BROWNING	Full Metal Jacket	3.2 / 49	Anvil	60	208	205	201	193	69	67	65	60	50
	231 77 03	7.65 BROWNING	Full Metal Jacket	4.75 / 73	Anvil	150	300	294	285	273	214	205	194	177	50
	241 69 97	9 MM BROWNING SHORT	ACTION EXTREME	5.5 / 85	Anvil	150	390	378	360	336	418	394	356	310	20
NEW Q2/21	242 12 06	9 MM BROWNING SHORT	ACTION EXTREME Fragmentation	5.5 / 85	Anvil	150	390	378	360	336	418	394	356	310	20
	231 77 05	9 MM BROWNING SHORT	Full Metal Jacket	6.15 / 95	Anvil	150	300	294	287	276	277	266	253	234	50
	231 85 55	9 MM MAKAROV	Full Metal Jacket	6.15 / 95	Anvil	150	310	304	296	283	288	277	263	240	50
	240 81 23	9 MM LUGER	ACTION EXTREME	7.0 / 108	Anvil	150	400	391	377	356	560	535	497	444	20
NEW Q3/21	242 12 05	9 MM LUGER	ACTION EXTREME Fragmentation	7.0 / 108	Anvil	150	400	391	377	356	560	535	497	444	20
	241 79 57	9MM LUGER	Full Metal Jacket DTX	7.5 / 115	Anvil	150	370	362	349	332	513	491	457	413	50
	231 86 29	9 MM LUGER	Full Metal Jacket	8.0 / 124	Anvil	125	360	350	337	319	518	490	454	407	50
rechtlicher	231 82 21	9 MM LUGER	Encapsulated Full Metal Jacket	8.0 / 124	-	125	360	351	340	325	518	493	462	423	50
erethind ber	231 81 95	9 MM LUGER	Copper-Plated Lead Round Nose	8.0 / 124	-	125	360	350	337	319	518	490	454	407	50
EREMOTION CONTRACT	231 88 40	9 MM LUGER	HEXAGON	8.0 / 124	-	150	350	341	328	311	490	465	430	387	50

### **PISTOL CARTRIDGES (CONTINUATION)**

		Item No.	Calibre	Bullet	Bullet weight g / gr	Primer	Barrel length (mm)*	Vo	Velocity V <sub>10</sub>	(m/sec) V <sub>25</sub>	V <sub>50</sub>	Eo	Energy E <sub>10</sub>	(Joule) E <sub>25</sub>	E <sub>50</sub>	Ctg/ box
		231 77 07	9 MM LUGER	Jacketed Hollow-Point	7.5 / 115	Anvil	150	370	355	335	319	513	472	422	407	50
	References	240 29 32	9 MM LUGER	Jacketed Hollow-Point	8.0 / 124	-	150	362	355	344	330	524	503	475	435	20
		231 77 08	9 MM LUGER	Full Metal Jacket Flat Nose	10.0 / 154	Anvil	150	283	278	270	259	400	386	366	336	50
		231 77 11	.38 SUPER AUTO	Full Metal Jacket	8.0 / 124	Anvil	150	430	411	385	348	740	675	591	485	50
NEW Q2/21		242 04 51	.40 S&W	ACTION EXTREME	10.0 / 155	Anvil	150	331	326	319	308	548	532	509	474	20
<b>NEW</b> Q3/21		242 12 07	.40 S&W	ACTION EXTREME Fragmentation	10.0 / 155	Anvil	150	331	326	319	308	548	532	509	474	20
	Ethiol bel	240 33 52	.40 S&W	Copper-Plated Lead Round Nose	10.7 / 165	-	150	353	348	340	329	667	647	619	579	50
		231 77 12	.40 S&W	Full Metal Jacket Flat Nose	11.7 / 180	Anvil	150	310	306	301	292	562	548	530	497	50
<b>NEU</b> Q2/21		242 12 09	.45 AUTO	ACTION EXTREME	11.3 / 175	Anvil	150	321	316	309	299	584	567	541	507	20
<b>NEW</b> Q3/21		242 12 08	.45 AUTO	ACTION EXTREME Fragmentation	11.3 / 175	Anvil	150	321	316	309	299	584	567	541	507	20
		240 44 64	.45 AUTO	HEXAGON	13.0 / 200	Anvil	150	261	260	258	254	441	437	431	418	50
		231 77 14	.45 AUTO	Full Metal Jacket	14.9 / 230	Anvil	150	260	256	250	240	503	488	466	429	50
	Ethillia del	240 30 90	.45 AUTO	Copper-Plated Lead Round Nose	14.9 / 230	-	150	261	259	257	253	508	501	492	476	50
		231 77 15	.45 AUTO	Jacketed Hollow-Point	14.9 / 230	Anvil	150	260	256	250	240	503	488	466	429	50

## **REVOLVER CARTRIDGES**

	ltem No.	Calibre	Bullet	Bullet weight g / gr	Primer	Barrel length (mm)*	V <sub>o</sub>	Velocity V <sub>10</sub>	v (m/sec) V <sub>25</sub>	V <sub>50</sub>	E <sub>o</sub>	Energy E <sub>10</sub>	(Joule) E <sub>25</sub>	E <sub>50</sub>	Ctg/ box
	212 76 01	.32 S&W LONG WC	Wad Cutter	6.5 / 100	Anvil	150	222	215	205	190	160	150	137	117	50
	231 77 16	.38 SPECIAL	Full Metal Jacket Flat Nose	10.2 / 158	Anvil	150	295	287	281	278	435	421	401	373	50
	231 77 17	.38 SPECIAL	Jacketed Hollow-Point	10.2 / 158	Anvil	150	295	285	273	255	444	415	379	331	20
	231 77 18	.38 SPECIAL	Lead Round Nose	10.2 / 158	Anvil	150	275	269	263	260	386	369	353	345	50
EREPTE SC	231 91 00	.38 SPECIAL	Copper-Plated Lead Round Nose	10.2 / 158		150	275	269	263	260	386	369	353	345	50
	231 75 36	.38 SPECIAL WC	Wad Cutter	9.6 / 146	Anvil	150	265	255	241	230	337	311	278	233	50
	231 77 20	.357 MAGNUM	Full Metal Jacket Flat Nose	10.2 / 158	Anvil	150	395	386	374	354	796	761	713	638	50
	231 77 21	.357 MAGNUM	Jacketed Hollow-Point	10.2 / 158	Anvil	150	395	381	363	337	796	741	672	581	50
	240 99 86	.357 MAGNUM	HEXAGON	11.7 / 180	Anvil	150	340	323	309	286	676	610	558	479	50
	240 29 31	.44 REM. MAG.	Full Metal Jacket Flat Nose	14.9 / 230	Anvil	150	368	362	354	342	1009	979	936	873	50
	231 77 22	.44 REM. MAG.	Softpoint	15.6 / 240	Anvil	150	445	435	420	395	1540	1471	1372	1213	50
	240 81 24	.44 REM. MAG.	HEXAGON	19.4 / 300	Anvil	150	277	275	270	267	744	734	707	692	50

\* CIP test barrel

## **SPECIAL CARTRIDGES**



**SUPER FLASH:** Whether as a deterrent or just for fun, the GECO 9 mm P.A. Knall SUPER FLASH offers more than an ordinary blank cartridge: In addition to the loud bang, the SUPER FLASH generates an orange muzzle flash.

This firelight is bright and long-lasting, and therefore an impressive effect not only in the dark. The cartridge can be identified by the white cap.



#### **BLANK CARTRIDGES**

Item No.	Calibre / Use	Ctg./ box	
*231 86 31	6 MM FLOBERT BLANK	100	
*231 86 30	.22 LONG BLANK	50	
*231 73 19	8 MM BLANK	50	
*231 75 30	9 MM PA BLANK	25	
*231 73 22	9 MM PA BLANK	50	
*231 76 95	9 MM PA BLANK SUPER FLASH	25	
*231 86 38	9 MM R BLANK (BP-RK)	50	
*231 75 08	9 MM R BLANK (NITRO-RB)	50	

#### PLASTIC BLANK/ DUMMY CARTRIDGES

Item No.	Calibre / Use	Ctg./ box	
212 82 84	9 MM LUGER BLANK	50	
*231 76 08	9 MM LUGER DUMMY	50	

Products marked \* can be purchased without licence

# RIMFIRE

Anyone looking for impressive, but still very inexpensive rimfire cartridges will find what they are looking for at GECO: The shooter can definitely rely on the absolute functionality, the consistent shooting behaviour, and the high precision. Whether RIFLE or SEMI-AUTO – GECO supplies solid ammunition that guarantees the necessary degree of accuracy, and all of that at an extremely affordable price.

**GECO RIFLE:** Reliable operation with self-loading weapons **GECO SEMI-AUTO:** Optimised for semi-automatics and pistols

- Good performance at an affordable price
- Training and practice ammunition for ambitious beginners
- All-purpose cartridges for beginners



Item No.	Calibre	Туре	Bullet Weight Type / g	Barrel length mm	Ve V <sub>o</sub>	elocity (m, V <sub>50</sub>	/s) V <sub>100</sub>	Er E <sub>o</sub>	ergy (Jou E <sub>50</sub>	le) E <sub>100</sub>	Sighting Distance	POI in cm 25 m	with scope 50 m	5 cm abov 75 m	ve bore axis 100 m
213 25 40	.22 l.r.	RIFLE	BR / 2.6	650	330	300	280	142	117	102	50 m	0.6	⊕	-7.4	-22.1
231 85 99	.22 l.r.	SEMI-AUTO	BR / 2.6	650	350	315	294	159	129	112	50 m	0.3	Ð	-6.5	-19.5

# AIRGUN

 The GECO DIABOLO was developed specifically with beginners and hobby shooters in mind. Because those who like to shoot a lot need accurate airgun pellets at a low price. The standardised processes in the manufacture of this smooth airgun pellet guarantee this.
 The GECO SUPERPOINT is a smooth airgun pellet with a conical head shape that has a high penetration capability and depth. It is therefore suitable for target shooting as well as for hunting applications in pest control. An optimised weight distribution ensures good accuracy.

Item No.	Туре	Calibre mm	Pellet Weight g	Pellet Length mm	Single pack.	Sales pack.
213 74 53	DIABOLO	4.5	0.45	5.2	500	5000
213 67 40	SUPERPOINT	4.5	0.50	6.9	500	5000



#### **SUPERPOINT**

- For recreational shooters
- Precise air gun pellets at a low price
- Reliable accuracy



#### DIABOLO

- For beginners and recreational shooters
- Precise air gun pellets at a low price
- Reliable accuracy

**1** POINTED BALL WITH SMOOTH REAR

# SHOT-SHELLS

#### COATED COMPETITION SLUG BLACK 26 LOW RECOIL

The GECO COATED COMPETITION SLUG BLACK 26 offers active shotgun users the following advantages:

- Teflon-coated slug for virtually no lead deposits in the barrel
- Minimal air pollution with lead vapour
- Carefully selected powder load for outstanding reliability and low recoil
- Short casing for higher capacity in tubular magazines
- The high velocity of 450 m/sec (1475 fps) makes leading moving targets unnecessary
- Low recoil
- Practical box of 100 with carry strap

#### **COATED COMPETITION SLUG RED 28**

**OPTIMIZED FOR SENSITIVE SEMI-AUTOS** 

#### The GECO COATED COMPETITION SLUG BLACK 28 offers active shotgun users the following advantages:

- Leaves almost no lead fouling in the barrel thanks to its Teflon-coated slug
- Absence of lead fumes leads to low air pollution
- Special powder charge for a safe use in sensitive semi-autos
- Shorter, transparent case allows for a higher capacity in tubular magazines
- The high velocity of 420 m/sec (1377 fps) makes leading moving targets unnecessary
- Practical 100-round pack with carry strap

Item No. Type	Gauge	Shot weight in g	V <sub>2,5 m</sub>	Ctg/box
231 76 25 CCS BLACK 26	12 / 67.5	26	450 m/sec	100
241 02 47 CCS RED 28	12 / 67.5	28	420 m/sec	100



#### **COATED COMPETITION BUCK SHOT**

This buckshot shell has been specially developed for IPSC competitions featuring mandatory buckshot stages. It therefore has the following distinct properties:

- 9 pellets with an 8 mm diameter for an optimal hit rate
- Nickel-coated shot to avoid edge shot, even with narrow choke tubes.
- Very narrow burst thanks to short slots guiding the pellets in the shot cup
- Short case for higher capacity in tubular magazines
- Works reliably even in responsive semi-automatics
- Low recoil

#### **DYNAMIC BIRD SHOT**

The area of application for these sport shot cartridges includes all dynamic shotgun shooting applications. Specially designed for IPSC disciplines and target shooting, this shell features the following properties:

- 2 versions perfectly suited to different shooting distances
- Cover and pellet weight perfectly calibrated
- Very narrow burst thanks to short slots guiding the pellets in the shot cup
- Short case for higher capacity in tubular magazines
- Works reliably even in responsive semi-automatics
- Low recoil





ltem No.	Туре	Gauge	Shot weight in g	Shot sizes in mm	V <sub>2,5 m</sub>	Ctg/box
240 02 32	СС ВИСК SHOT	12 / 65	27	8.0 mm	410 m/sec	25
240 02 35	DYNAMIC BIRD SHOT 29	12 / 65	29	2.75 mm	400 m/sec	25
240 02 34	DYNAMIC BIRD SHOT 31	12 / 65	31	2.9 mm	390 m/sec	25

# COMPONENTS

**GECO reloading components have been valued for decades by sports shooters and hunters** and are synonymous with professional quality worldwide. The high-tech components guarantee extremely easy assembly and impress with their optimised sensitivity.

GECO's portfolio includes rifle cartridges, bullets and primer caps, but also encompasses handgun ammunition in the form of bullets, cases as well as the respective percussion caps. **8**00


## **BOXER PRIMERS**

GECO reloading components have been valued for decades by sport shooters and hunters and are synonymous with professional quality worldwide.

Item No.	Туре	0 mm	Suitability	Calibre	pcs/ box	Sales pack.
240 94 51	SMALL PISTOL PRIMER	4.45	SMALL PISTOL	6.35 7.65 9 MM LUGER 9×21 .32 S&W LONG .38 SPECIAL WC .38 SPECIAL .38 SUPER AUTO .40 S&W .357 MAG.	250	2500
240 94 52	SMALL RIFLE PRIMER	4.45	SMALL RIFLE	.22 HORNET .222 REM. 5.6×50 5.6×50 R .30 CARBINE .223 REM.	250	2500

#### To complete the program, GECO offers two Boxer primers: GECO Small Pistol and GECO Small Rifle primers.

The two high-tech components guarantee extremely easy assembly and impress with their optimised sensitivity. Both are available in practical boxes of 250, which offer great value for money.

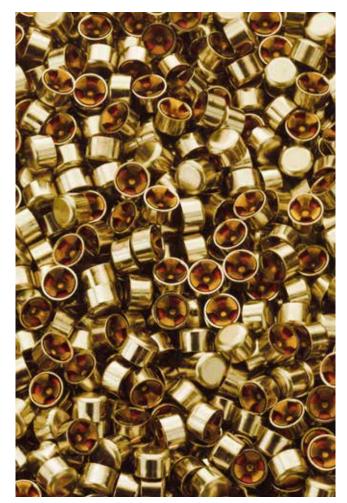

#### ETS FOR CENTREFIRE RIFLE CARTRIDGES

Item No.	Туре	Weight g / gr	Dia	Bullets/box
CALIBRE .243				
214 58 55	SOFTPOINT	6.8 / 105	.243	50
CALIBRE 6,5 MM				
231 85 68	SOFTPOINT	10.1 / 156	.264	50
231 85 62	PLUS	10.1 / 156	.264	50
CALIBRE 7 MM				
241 69 69	ZERO	8.2 / 127	.284	50
241 69 85	EXPRESS	10.0 / 155	.284	50
214 54 05	SOFTPOINT	10.7 / 165	.284	50
231 85 63	PLUS	11.0 / 170	.284	50
CALIBRE .270				
241 69 84	EXPRESS	8.4 / 130	.277	50
241 69 68	SOFTPOINT	9.1 / 140	.277	50
241 69 89	PLUS	9.7 / 150	.277	50
CALIBRE .30				
241 69 70	ZERO	8.8 / 136	.308	50
241 69 87	EXPRESS	10.7 / 165	.308	50
214 54 13	SOFTPOINT	11.0 / 170	.308	50
231 85 64	PLUS	11.0 / 170	.308	50

ltem No.	Туре	Weight g / gr	Dia	Bullets/box	
CALIBRE 8 MM S					
241 69 71	ZERO	9.0 / 139	.323	50	
214 54 21	SOFTPOINT	12.0 / 185	.323	50	
231 85 65	PLUS	12.7/196	.323	50	
CALIBRE 9,3 MM					
241 69 72	ZERO	11.9 / 184	.366	50	
241 69 88	EXPRESS	16.5 / 255	.366	50	
214 54 48	SOFTPOINT	16.5 / 255	.366	50	
231 85 66	PLUS	16.5 / 255	.366	50	



geco-ammunition.com 44

EAD FREE

AD FREE VLLET

## BULLETS FOR PISTOL AND REVOLVER CARTRIDGES

Item No.	Calibre	Туре	Weight g / gr	Dia	Bullets/box		
240 04 00 240 04 01	9 MM	Full Metal Jacket	8.0 / 124	.355	200 1500		
231 90 10 231 90 11	9 MM	HEXAGON	8.0 / 124	.355	200 1500		
231 81 47 231 81 48	9 MM	Full Metal Jacket Flat Nose	10.0 / 154	.355	200 1500		
231 81 49	9 MM	Jacketed Hollow-Point	7.5 / 115	.355	200		
231 81 50 231 81 51	.40 S&W	Full Metal Jacket Flat Nose	11.7 / 180	.401	200 1500		
241 78 48	.45 AUTO	HEXAGON	13.0 / 200	.451	200		
231 81 53	.45 AUTO	Full Metal Jacket	14.9 / 230	.451	200		
231 81 54	.45 AUTO	Jacketed Hollow-Point	14.9 / 230	.451	200		
231 81 55 231 81 56	.38 SP/ .357 MAG.	Full Metal Jacket Flat Nose	10.2 / 158	.357	200 1500		
231 81 57	.38 SP/ .357 MAG.	Jacketed Hollow-Point	10.2 / 158	.357	200		
231 94 83 231 94 84	.38 SP/ .357 MAG.	HEXAGON	11.7 / 180	.357	200 1500		
241 78 52	.44 REM. MAG.	HEXAGON	19.4 / 300	.431	200		

# CASES FOR PISTOL AND REVOLVER CARTRIDGES

Calibre	ltem No.	Cases/box	Calibre	Item No.
.38 SPECIAL	231 81 37	100	9 MM LUGER	231 81 29
.38 SPECIAL	231 81 38	1000	9 MM LUGER	231 81 30
.357 MAG	231 81 39	100	.38 SUPER AUTO	231 81 31
.357 MAG	231 81 40	1000	.38 SUPER AUTO	231 81 32
.44 REM. MAG	241 78 53	100	.40 S&W	231 81 33
.44 REM. MAG	240 94 87	1000	.40 S&W	231 81 34
		100	.45 AUTO	231 81 35
		1000	.45 AUTO	231 81 36



目標

Cases/box

# **OPTICS** FOR A BETTER PERSPECTIVE

As far back as the 1930s, Gustav Genschow & Co. (GECO) sold binoculars under the GECO brand. Building on this tradition, GECO now offers riflescopes, red dot sights and binoculars of the highest optical and mechanical quality at a uniquely fair price.

Focused on and designed for the fundamental demands of hunters, marksmen and nature enthusiasts, these products have a universal range of use and are true to the motto: **"Where Excitement Starts"**.

# RIFLE-SCOPES

The line of GECO riflescopes includes a model for practically every conceivable situation: From stalking to hunting from a high seat to driven hunts, from daytime to dusk and even night-time hunting, but also for long range shots and sport shooting.

### **RIFLESCOPES BEST QUALITY AT A FAIR PRICE**

The range includes riflescopes with 4x and 5x zoom, and leaves nothing to be desired.

RIFLE SCOPE | ZIELFERNROHR | LUNETTE DE TIR

 Illuminated fibre optic reticle Tool-free zeroing of the turrets

WHERE EXCITEMENT STARTS

acher

The 4x zoom riflescopes have a central tube diameter of 30 mm and stand out due to their optical performance specs for transmission, field of view and exit pupil. With the  $3-12 \times 56$  and the  $6-24 \times 50$ , the range includes two absolute classics with outstanding performance specs for this price class.

The 5x zoom riflescopes with a central tube diameter of 30 mm stand out with their optimised zoom factor and thus increased flexibility and versatility without sacrificing their high optical performance.

#### NEW $1.7 - 9 \times 44i$

With a magnification range of 1.7-9 x, the new GECO riflescope is the ideal choice for a wide range of use cases, from high seat to driven hunts. It boasts a 44 mm lens diameter which is well suited to hunts that continue through to dusk, and which remains easy to handle when used in combination with night-vision equipment.

#### **OPTICS**



#### 1-5x24i

The perfect companion during driven hunts. Its large field of view improves safety and ensures that the shooter always has a comprehensive overview. The 5x zoom enables fast shooting even at long distances.



#### 3-12x56/56i

The classic all-rounder for high seat and night-time hunting. Its 56 mm diameter lens, high transmission, and illuminated reticle offer increased reliability, even in extremely unfavourable lighting.



#### 3,5-18x56i


With its large lens diameter and illuminated reticle, this riflescope ensures you are always ready to take shots at short or long range even in extremely unfavourable light conditions. The focus here is on its flexibility and high optical performance.

### **RIFLESCOPES** WHERE EXCITEMENT STARTS





The specialist for long distances. Its high magnification is perfect for accurate shooting at long distances. This is supported by the GECO TR1 ballistic reticle and the high optical performance allows the recognition of even the finest details at long distances.

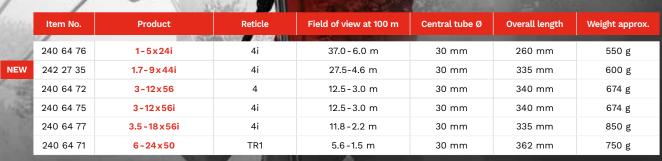

#### **RED DOT SIGHT** FOR DRIVEN HUNT AND DYNAMIC SPORT SHOOTING

#### At present, GECO reflex sights are available in two different designs: Red Dot R20-2.0 and Open Red Dot Sight.

Unlike riflescopes, reflex sights offer no or only minimal magnification. But they are parallax-free. Shooters can also use both eyes to acquire the target. Reflex sights by GECO are built for hunting and sport shooting.



Item No.	Product	Reticle	Field of view at 100 m	Central tube Ø	Overall length	Weight approx.
231 92 19	RED DOT R20-2.0	2 MOA Dot	100 m	22 mm	62 mm	130 g
240 71 55	OPEN RED DOT SIGHT	2 MOA	100 m	19x23 mm	46 mm	30 g



PLS. SEE PAGE 55



#### **RED DOT R20 - 2.0**

The ideal companion for driven hunts over difficult terrain. The finely dimmable illuminated dot with a diameter of 2 MOA facilitates quick, intuitive and reliable target acquisition in every situation. The built-in weaver mount means the GECO Red Dot can be attached quickly and easily.



#### **OPEN RED DOT SIGHT**

The new GECO Open Red Dot Sight is exceptionally compact, lightweight and at the same extremely robust. With its open field of view, it is the optimal companion on driven hunts for targets at short and medium distances with intuitive target acquisition. The fine 2 MOA dot is adjustable to six brightness levels. The specially coated and scratch-resistance glass lens prevents reflections. Replacing batteries is exceedingly user-friendly and can be done on the side compartment even when mounted, using commercially available mounting adapters on all bases.

CAUTION: Not suitable for use on handguns!

# BINOCULARS

**GECO binoculars offer the perfect entry into the world of qualitative, high-grade observation optics with unbeatable value for money.** The slim and ergonomic design is combined with high-quality materials. The entire housing is made of magnesium. ED glass, multilayer coating and an adjusted optical design allow for large fields of view, sharp edge definition, high transmission values and great close focus.

These models stand out from their competitors due to their robustness, light weight and optical performance.

# **BINOCULAR RF**

The GECO RF is remarkable not just because of its outstanding optics, but also because of its reliable and precise range-finding with rock-solid ballistics. The magnesium casing and the high-quality aluminum eye cups make the binoculars very robust, and as such the ideal companion for nature-lovers. Top-of-the-range optics combined with cutting-edge laser technology at an attractive price.

#### PLS. SEE PAGE 55

lte	m no.	Product	Colour	Exit pupil	Field of view at 1000 m	Close focus	Overall length	Width approx.	Measuring range		
					1012 2 4	and the second		- Caller	Dara and a da		
241	42 61	10 x 50 RF	green	5	110 m	3	160 mm	130 mm	10 m-1.600 m		
240	64 79	10 x 50 RF	black	5	110 m	3	160 mm	130 mm	10 m - 1.600 m		

#### 10x50 RF

The GECO 10x50 RF pairs a magnesium housing with a robust and shock-absorbing rubber armor so that it can offer an optimal protection for sensitive optical and electronic elements as well as moving parts.

With the use of high-quality HD optics in combination with cutting-edge multiple lens coatings, top performance in

light transmission, field of view, edge sharpness and color fidelity are achieved. The distance to all objects from 10 to 1600 meters away can be simply and reliably determined at the touch of a button. In addition, the GECO RF can measure both angle of elevation (and corrected distance using the integrated ballistics calculator) and temperature.

Weight

1.000 g

1.000 g

6

The GECO 10x50RF comes with a carrying strap and a hard case.

9

8

#### **OPTICS**

#### PLS. SEE PAGE 55



#### 8 x 32/ 10 x 32



The perfect companion for virtually every observation scenario. Extreme compactness and low weight make for optimum handling. Their optics deliver razor-sharp images in good ambient light.

fig. 10 x 42

8x42/ 10x42



Due to a wide field of view, they offer an excellent overall view coupled with a steady image. A greater lens diameter, ED glass and GECObright multi-layer coating create sufficient light reserves for use into advanced twilight.

fig. 8x56

#### 8x56/ 10x56



Both powerful and effective. The compact and lightweight design combined with the very large fields of view and the large exit pupil make spotting a relaxed activity. The high transmission values create bright and high-contrast images for hunting until nearly nightfall.

#### **BINOCULARS** HIGH QUALITY OBSERVATION OPTICS FOR EVERY APPLICATION

All products come with a tripod connection, a shoulder strap and a hard case.

					1						
Selection 1	ltem No.	Colour	ltem No.	Colour	Product	Exit pupil	Field of view at 1000 m	Close focus	Overall length	Weight approx.	
	241 42 55	green	240 37 24	black	8x32	4	136 m	2	125 mm	500 g	
	241 42 56	green	240 37 25	black	10x32	3.28	105 m	2.5	125 mm	500 g	
	241 42 57	green	240 37 26	black	8x42	5.25	142 m	2	145 mm	670 g	
	241 42 58	green	240 37 27	black	10 x 42	4.2	113 m	2.5	145 mm	670 g	
	241 42 59	green	240 37 28	black	8x56	7	129 m	2.3	192 mm	1.200 g	
	241 42 60	green	240 37 29	black	10x56	5.6	114 m	2.5	192 mm	1.200 g	
		100	John Marine						geco-on	tics.com 54	

## **ICONOGRAPHY**



LIGHTWEIGHT, RUGGED MAGNESIUM HOUSING



GECOBRIGHT - MAXIMUM TRANSMISSION IN EVEN THE MOST ADVERSE LIGHTING CONDITIONS



HARD-SHELL CARRY CASE FOR MAXIMUM PROTECTION



HD GLASS FOR IMAGES WITH MAXIMUM BRILLIANCE



EXTREMELY ERGONOMIC THANKS TO THE MICROBRIDGE



HIGHEST-QUALITY ALUMINIUM



GECOTRAC - HEIGHT ELEVATION AND TARGET TURRET IN ONE



GECODROP - DIRT- AND WATER-REPELLENT, HYDROPHOBIC COATING FOR CLEAR SIGHT



GECODOT - INTELLIGENT AUTOMATIC SHUTOFF FOR MAXIMUM ENERGY EFFICIENCY



STATIC TARGET SHOOTING



ED GLASS FOR RAZOR-SHARP IMAGES



DETACHABLE MOUNTING



EXTENDED FIELD OF VIEW FOR OPTIMUM OBSERVATION



GECOCONTROL - INTELLIGENT AUTOMATIC SHUTOFF FOR MAXIMUM ENERGY EFFICIENCY



TRAINING

RETICLE ADJUSTMENTS

TACTICAL TURRET FOR FAST AND ACCURATE BULLET DROP COMPENSATION



10-YEAR GUARANTEE (WARRANTY ON ELECTRONIC COM-PONENTS LIMITED TO 24 MONTHS)



WITH INTEGRAL RANGEFINDER



TOOL-FREE RESETTING FOR ULTRA-FAST LOCKING



2 MDA



CENTRAL FOCUSING WITH INTEGRATED DIOPTRE ADJUSTMENT MAKES HANDLING EASY



5-YEAR GUARANTEE (WARRANTY ON ELECTRONIC COM-PONENTS LIMITED TO 24 MONTHS)



DIVERSE MEASURING OPTIONS: DISTANCE, ANGLE, BALLISTIC RANGE



34MM CENTRAL TUBE DIAMETER FOR LARGE ADJUSTMENT RANGES



RETICLE IN THE FIRST IMAGE PLANE FOR TACTICAL SHOOTING

geco-optics.com 55











































GECO TR

GECO TR1 - ACCURATE

LONG-RANGE-SHOOTING WITHOUT













YEARS GUARANTEE

2-YEAR GUARANTEE

(WARRANTY ON ELECTRONIC COM-

PONENTS LIMITED TO 24 MONTHS)

LIGHTWEIGHT CONSTRUCTION

FOR OPTIMUM HANDLING

























### 0 **f**

#### GECO IS A REGISTERED TRADEMARK OF RUAG AMMOTEC, A RUAG GROUP COMPANY. RUAG AMMOTEC – FÜRTH, GERMANY

In accordance with the Weapons Act of the Federal Republic of Germany, purchase records must be kept and permission to purchase is required for many products in this catalogue. Products for which no records must be kept and/ or for which no permission to purchase is required by law are marked accordingly. We reserve the right to make technical alterations to the products illustrated or described without giving prior notice. The complete range of products is not available in every country!

Although the information contained in this brochure is correct to the best of our knowledge, we cannot accept liability for any errors or inaccuracies. We reserve the right to discontinue or modify any product at any time without giving prior notice. Delivery of the products depicted may be subject to legal restrictions.

All rights to photocopies and to the reprinting of excerpts are to be granted solely with the written permission of RUAG Ammotec GmbH.